


DA-T系列音频定压适配器



特点:

1. 双路输入，双路输出，区别传统的定压功放单路输出。
2. 双通道定压，功率更大，可接更多的定压扬声器。
3. 70V/100V的定压输出，匹配相应的定压扬声器。
4. 内置大容量耦合电容，缓冲扬声器反冲电压，使功放更稳压工作。
5. 更安全的接插座，接口有相应的绝缘措施。

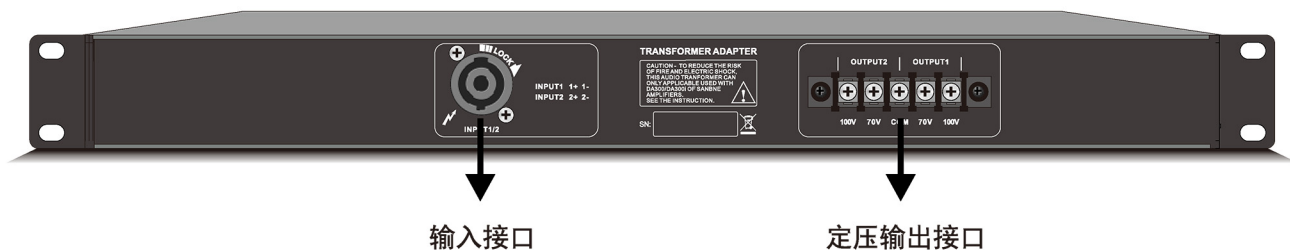

技术参数:


型号 类别	DA-T1	DA-T2	DA-T3
输出功率	120W+120W	200W+200W	300W+300W
输出电压	70V/100V	70V/100V	70V/100V
输入电压	30V	40V	49V
适配功放	DA100 / DA100i	DA200 / DA200i	DA300 / DA300i
频率响应	80Hz-16KHz -3dB		
注意事项	功放接入定压适配器时，功放需衰减80Hz以下频率； 避免过低频响损坏功放及扬声器。		

DA-T SERIES AUDIO CONSTANT VOLTAGE ADAPTER



Features:

1. Double lines input and output, different from traditional single output amplifier.
2. Double channel, more power, can connect with more loudspeaker.
3. 70V/100V output, compatible with relevant loudspeaker.
4. Built-in high coupling capacity, buffer recoil voltage of loudspeaker, make amplifier more stable.
5. Safety power plug with insulation protection connector.

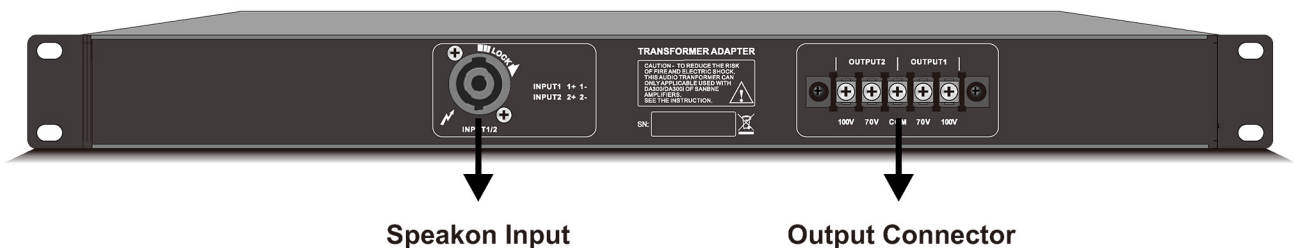

Specifications:

Model category	DA-T1	DA-T2	DA-T3
Output Power	120W+120W	200W+200W	300W+300W
Output Voltage	70V/100V	70V/100V	70V/100V
Input Voltage	30V	40V	49V
Compatible Amplifier	DA100 / DA100i	DA200 / DA200i	DA300 / DA300i
Frequency Response	80Hz-16KHz -3dB		
Notes	When power amplifier connect with adapter, frequency must damping below 80Hz, avoid low frequency damage amplifier and loudspeaker.		